




# Balanced Spiral Belting

## Request for Quotation


Please supply the following dimensions:

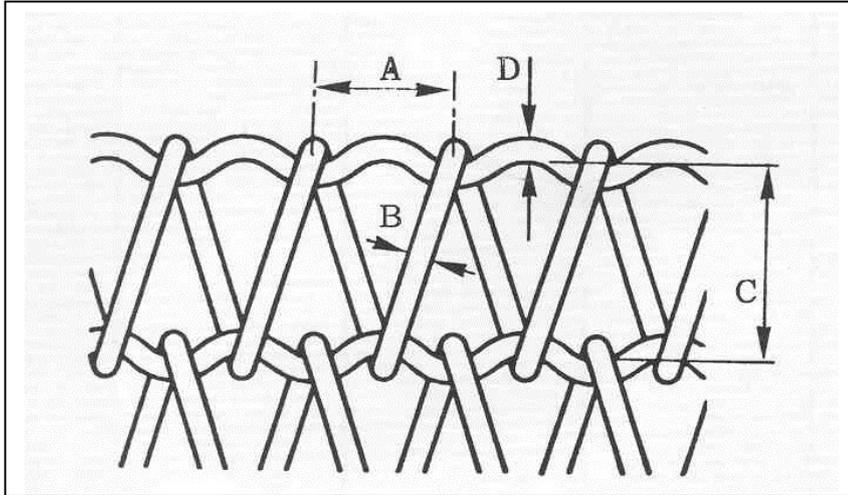

Welded Edge (W)



Laddered Edge (LD)\*\*



Hooked Edge (U)\*\*

**\*NOTE:** When measuring pitches A & C, it is best practice to measure over 10 pitches and then divide by 10 to obtain the average pitch.

\*\* Only available in large mesh sizes.

<b>Material:</b>	<b>Overall Width:</b>	mm	<b>Length:</b>	metres
------------------	-----------------------	----	----------------	--------

<b>A</b>	Coil Pitch*	mm	<b>Edge Type</b>	
<b>B</b>	Coil Wire Diameter <i>If Flat-Wire, <input type="checkbox"/> please give cross-section</i>	mm	Welded (BSW)	
<b>C</b>	Crimped Cross Wire Pitch*	mm	Laddered (BS-LD)**	
<b>D</b>	Crimped Cross Wire Diameter	mm	Hooked (BS-U)**	

Drive Method	
<b>Positive Drive (BSW-PD)</b>	
<b>Friction Drive (BSW)</b>	

Sprocket Profile		Sprocket Material:		
European (PDE):	American (PDA):	Alternative (PDC):		

If fitted with Side Chains, please refer to the Chain Edge Drive enquiry sheets.

Please add further information here or on separate sheet: