


Eye-Flex Conveyor Belt

Request for Quotation


Please supply the following dimensions, where applicable;

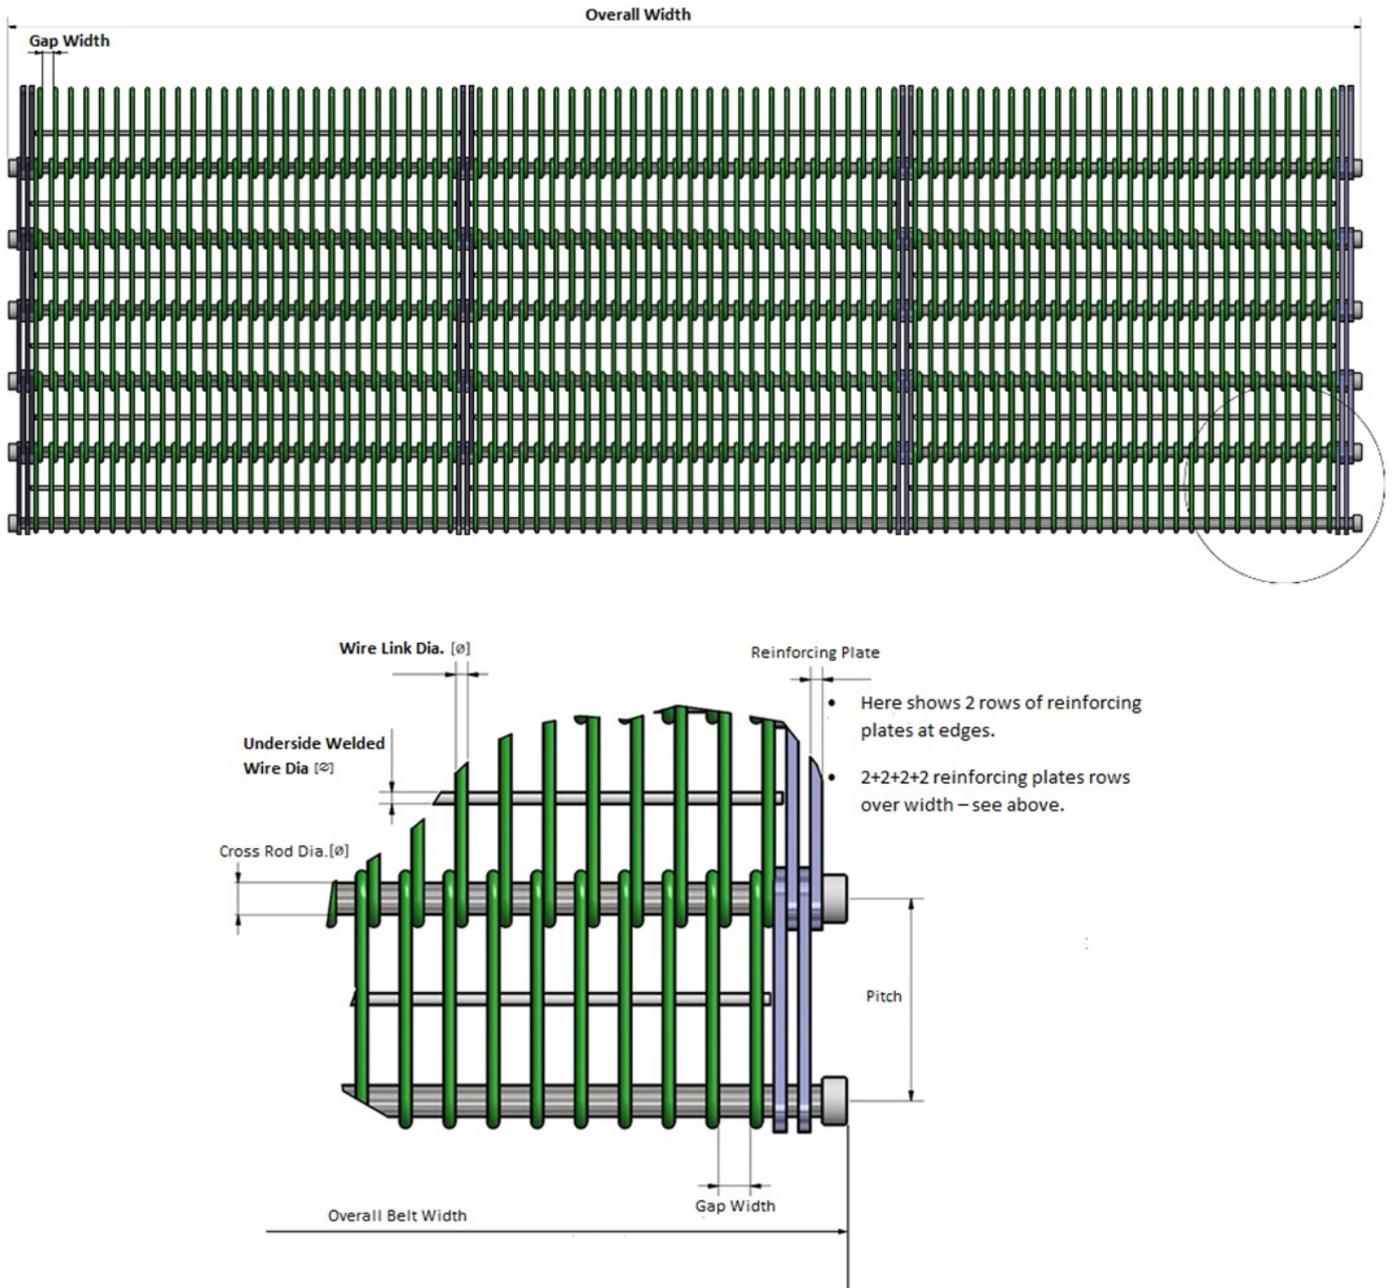

| | |
|--------------------------------------|--|
| Application: (please tick) | New <input type="checkbox"/> |
| | Existing <input type="checkbox"/> |

| | | |
|----------------------------|-------------------------------------|-------------------------------|
| Part No: (if known) | Required Belt Length: metres | Overall Belt Width: mm |
| Material: | | |

Gap Spacing Assembly Type (please tick below)

| | | | | |
|--|---|---|--|---|
|  |  |  |  |  |
| Normal Gap | Underside Welded Wire | Ring Spacers | Compression Springs | Spacer Sleeves |
| | | | | |

| | |
|---|---|
| Pitch: mm | Link Wire Dia: mm |
| Cross Rod Diameter: mm | Gap Width: mm |
| Belt Edge Type: (please tick) Standard Edge (without chains) Hollow Bearing Pin Chain Reinforcing Plate & Roller Assembly | Chain Centre Width: mm (only required when with chain edges) Usable Belt Width: (inside chains) mm (only required when with chain edges) |
| Additional options: (please tick) Cross Flights: Side Guards: | Layout of reinforcing plates: (Example: 2 + 2 = double rows only at the edges; 3 + 3 + 3 = triple rows at edges plus an additional triple row in the middle) |

Additional Information: