


# Ladder-Track™ conveyor belt

## Request for Quotation

Please supply the following dimensions, where applicable:

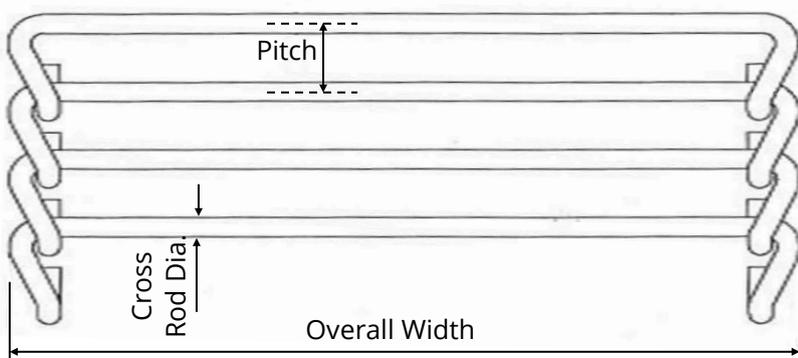

**Straight Running Ladder Belt**

**Material:**  Stainless steel  Carbon Steel

**Overall Width:** \_\_\_\_\_ mm


**Cross Rod Pitch:** \_\_\_\_\_ mm

**Cross Rod Dia:** \_\_\_\_\_ mm


**Length:** \_\_\_\_\_ mtrs

STRAIGHT RUNNING LADDER-TRACK BELT IMPERIAL & INTERNATIONAL STANDARD SPECIFICATIONS				
Gauge	Pitch		Wire Dia	
	mm	(in)	mm	(in)
6g	25.4	1	4.88	0.192
9g	25.4	1	3.66	0.144
6g	19.05	0.75	4.88	0.192
7g	19.05	0.75	3.66	0.144
6g	15.87	0.625	4.88	0.192
7g	15.87	0.625	4.47	0.176
9g	12.7	0.5	3.66	0.144

Metric specifications and 'specials' are available in pitches from 6.35mm up to 100mm, and in 2mm to 8mm thick rods.

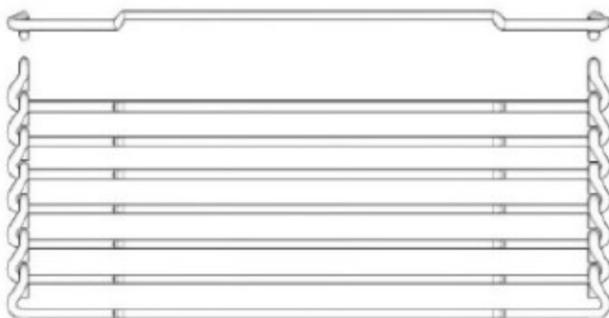

Flight

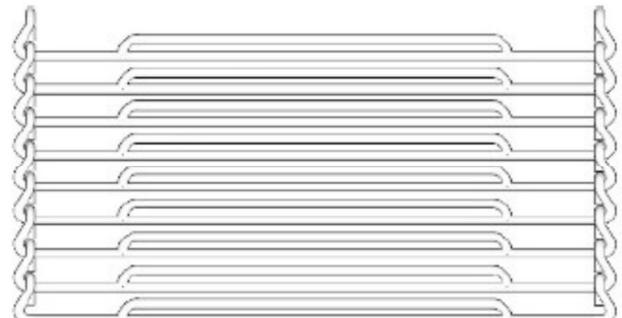

U-bar Filler Rod

Further Information: