





The Trusted Metal Conveyor Belt Manufacturer™

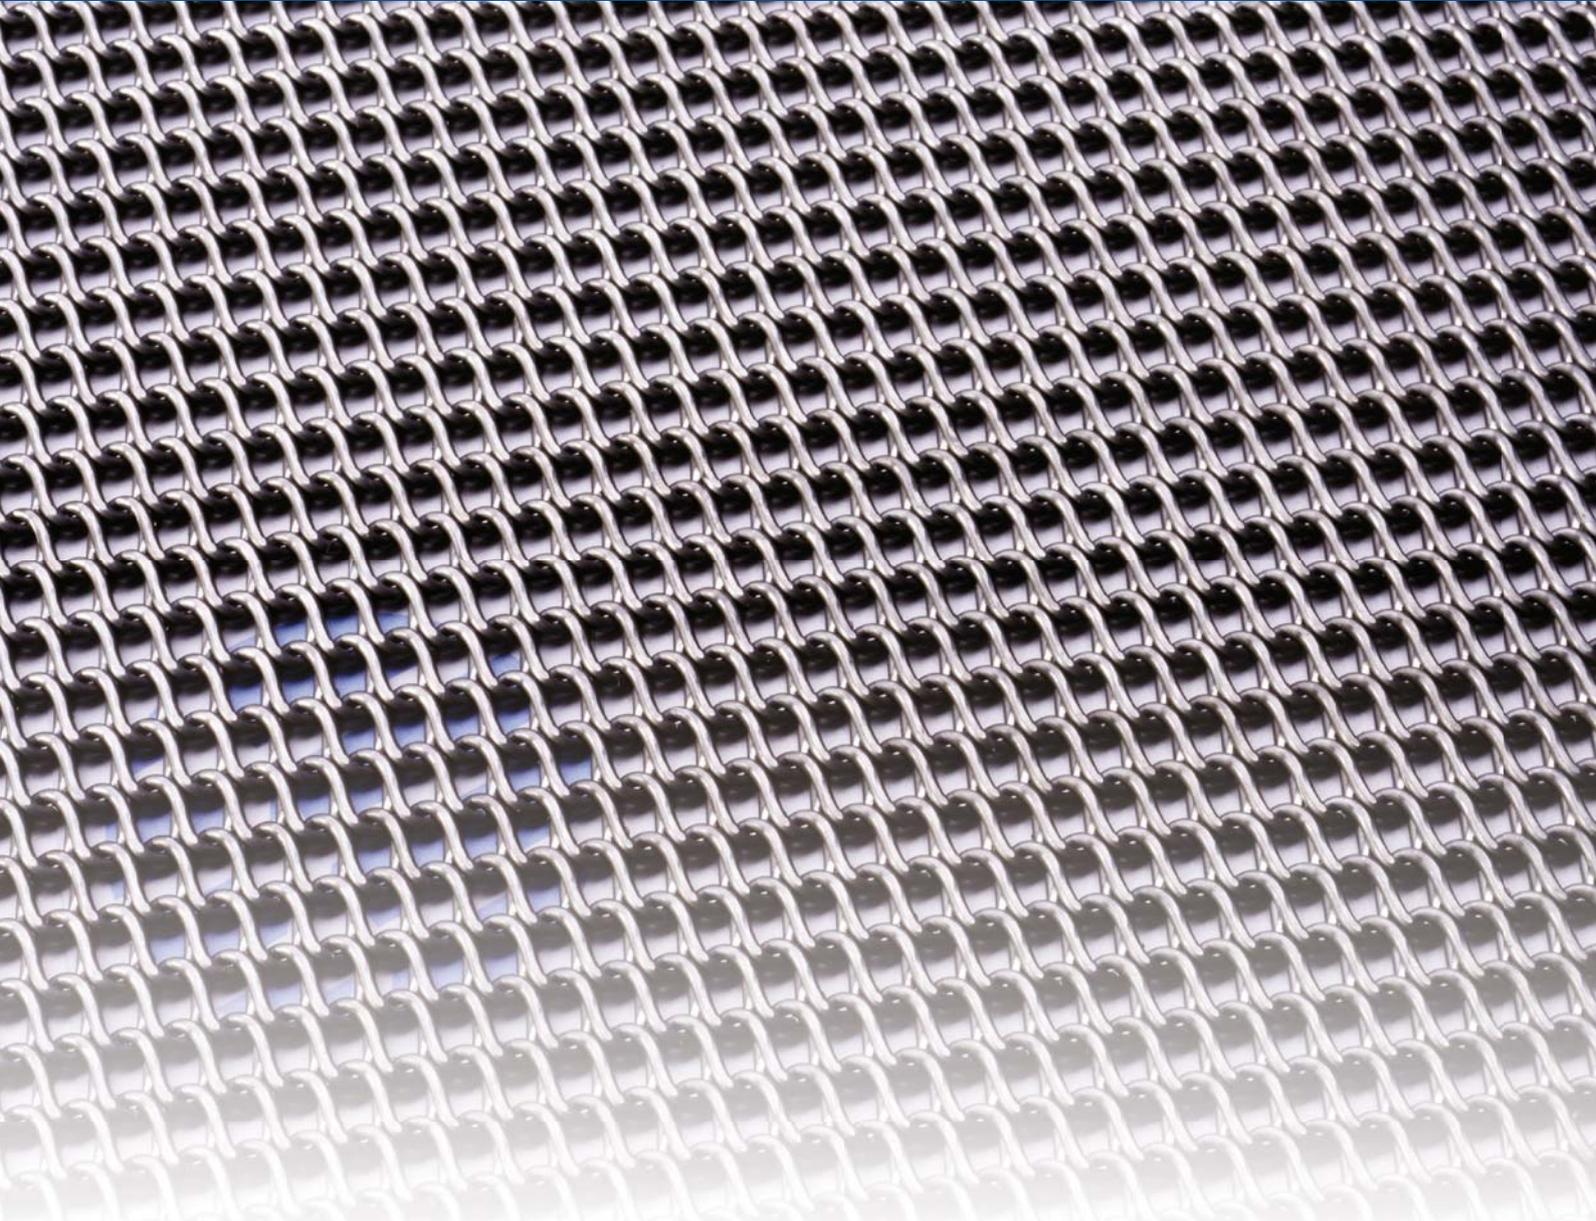

Rolled Baking Band

www.wirebelt.co.uk

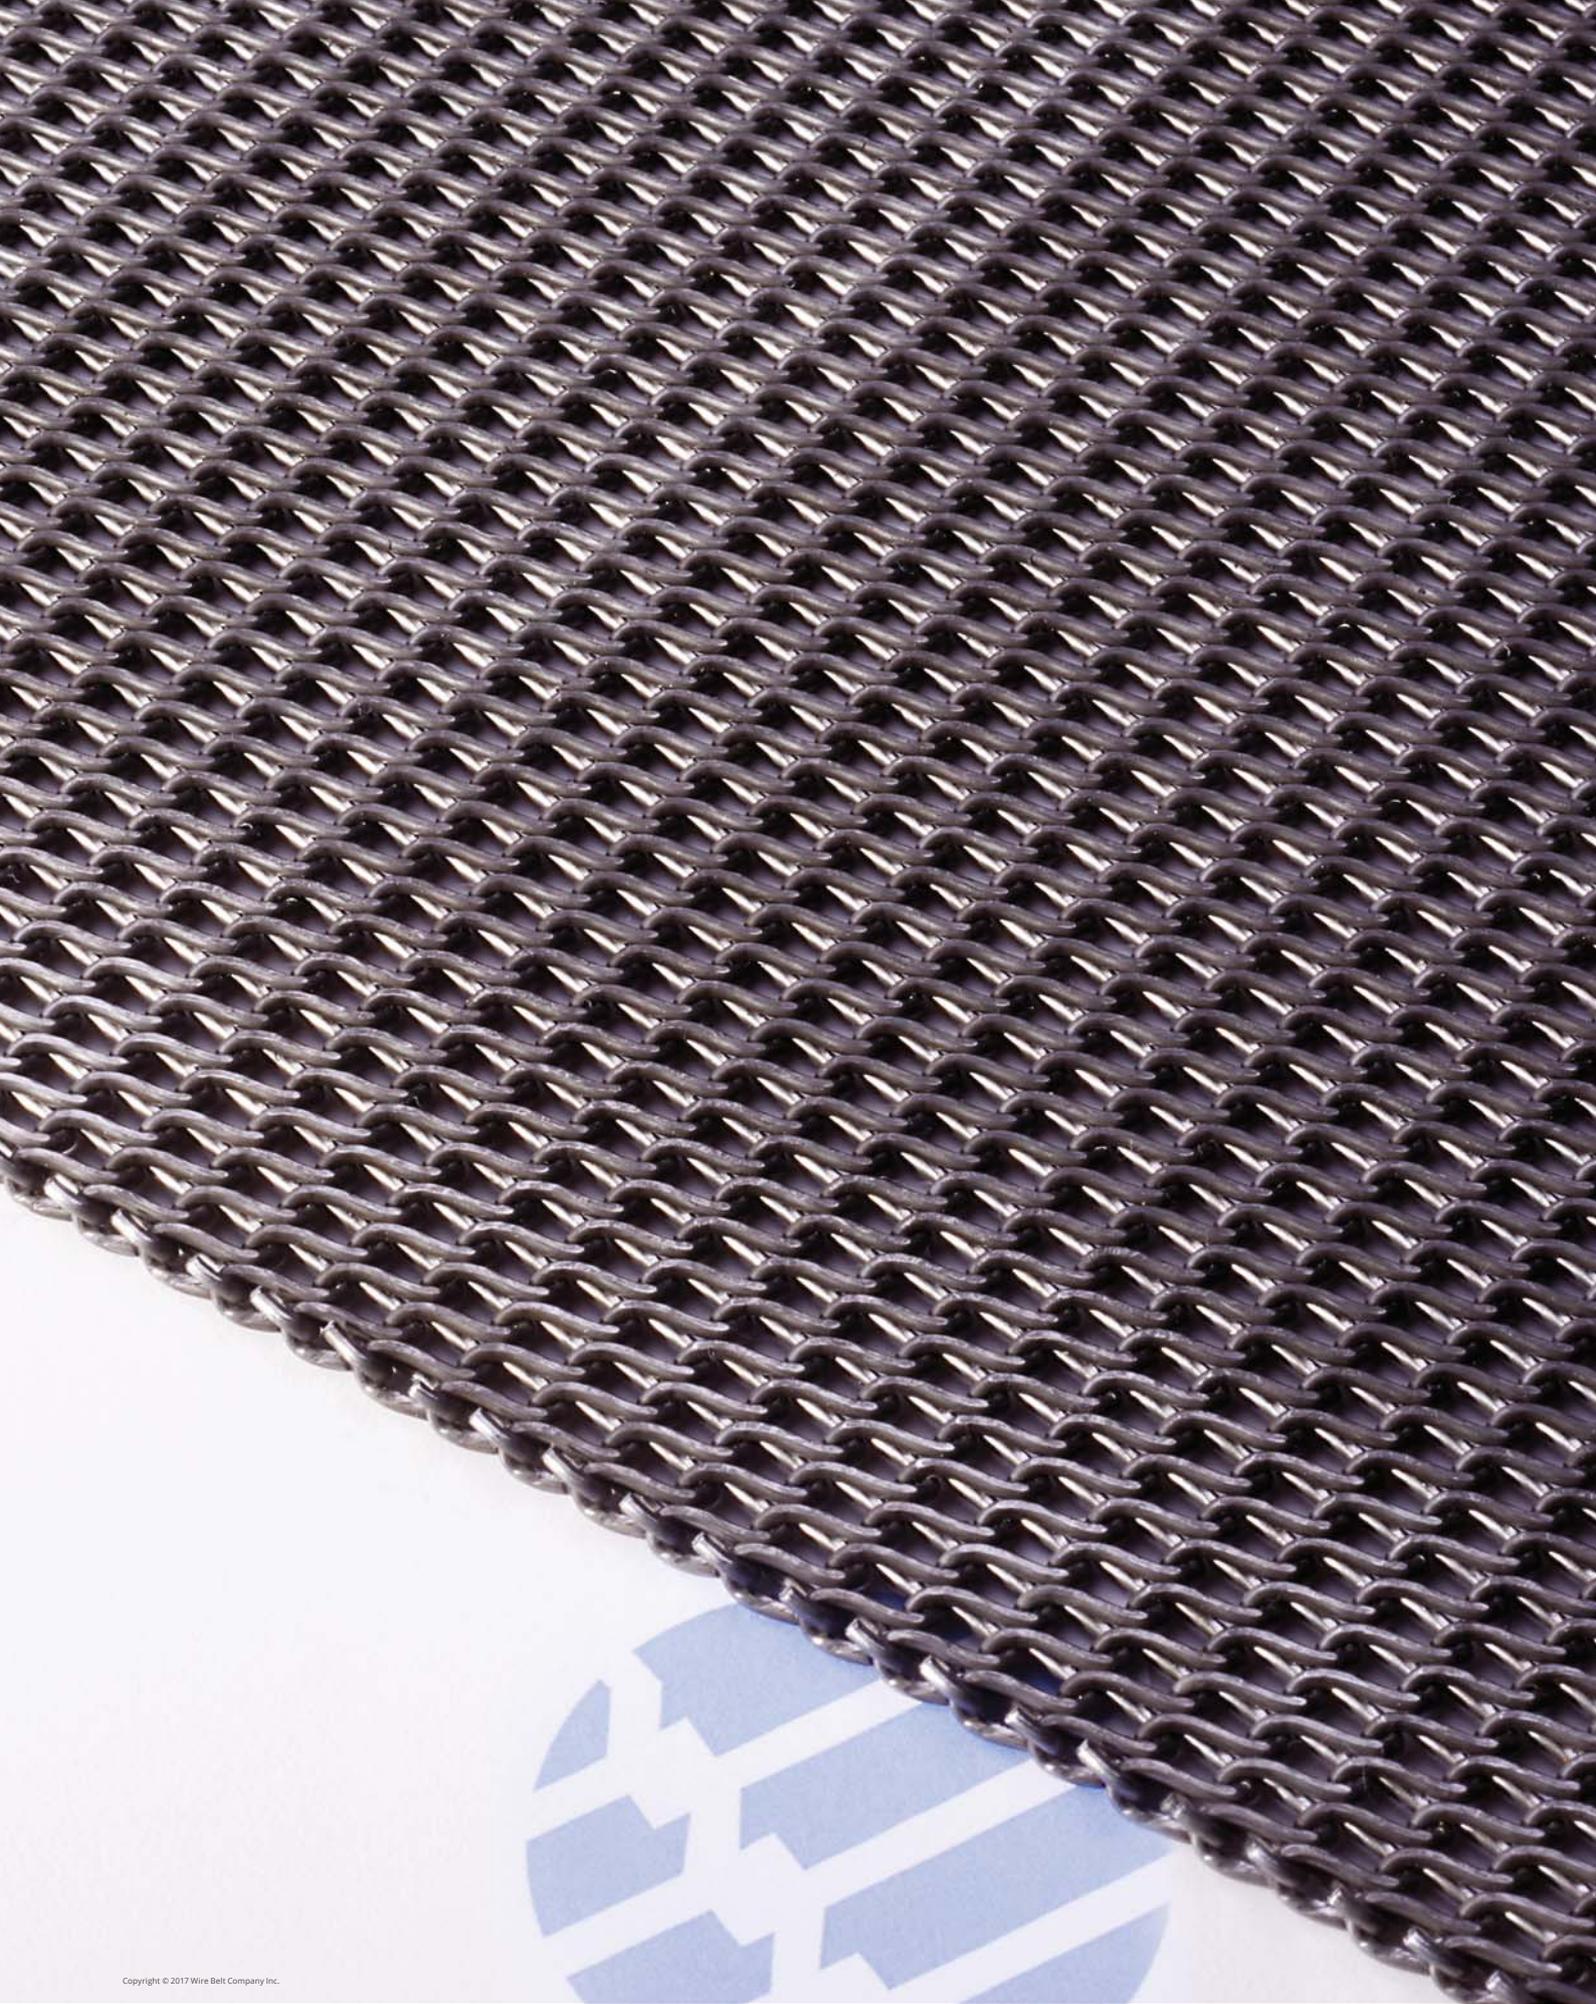


Copyright © 2017 Wire Belt Company Inc.

Rolled Baking Band


Wire Belt Company's Rolled Baking Band is designed primarily for ovens common to the baking industry, where an extremely flat carrying surface is required for the direct baking of biscuits and cookies. These belts are often installed in biscuit baking tunnel ovens in lengths in excess of 100 metres with baking zone temperatures up to approximately 310°C.

Rolled Baking Band, also known throughout the industry as "Z Belts", is created by forcing a duplex unilateral spiral woven mesh through a rolling process to achieve a completely flat, smooth surface and a reduced belt thickness, without compromising heat efficiency. The design creates a belt of low mass, high strength with good air circulation. The belt is friction-driven by means of a large diameter drum, commonly placed at the out feed of the tunnel oven.

By providing a flat, uniform surface, Rolled Baking Band is suitable for conveying both soft and hard dough through baking processes whilst ensuring an even heat transfer across the whole belt width. Rolled Baking Bands may not be suitable for soft doughs with a high fat content where the dough will flow into the mesh in the baking process.

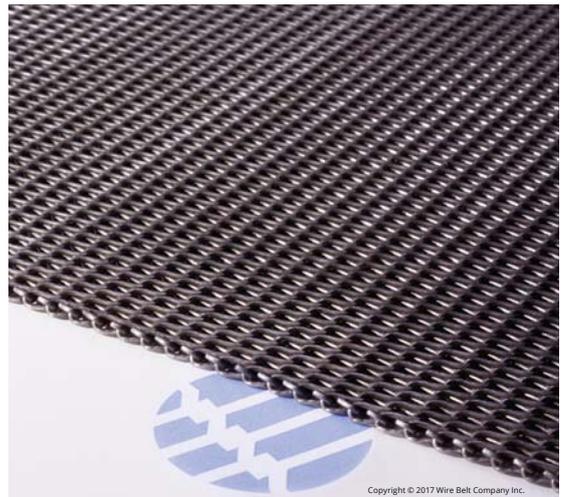

Copyright © 2017 Wire Belt Company Inc.

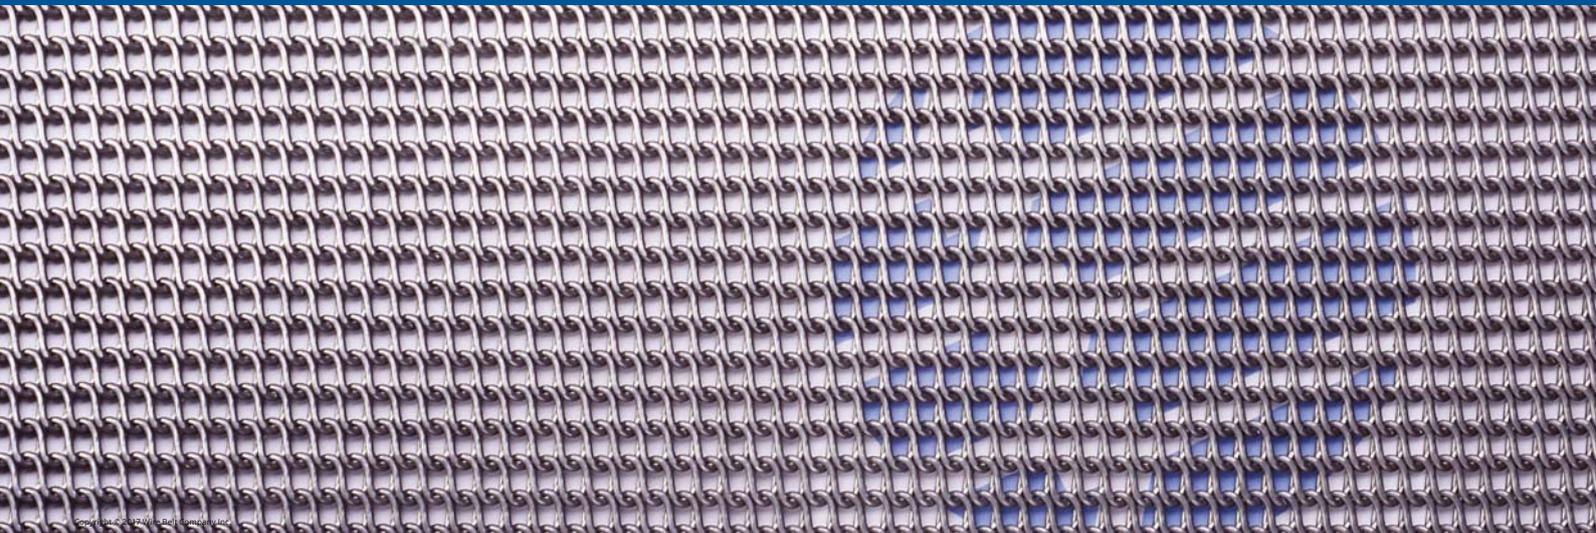


Rolled Baking Band

Typical Rolled Baking Band Applications:

Rolled Baking Band has many and varied uses, below is a list of typical applications. If you have an application that is not listed below, contact our Technical Sales Engineers to see if Rolled Baking Band is the right belt for your needs.

- Cooking
- Heating
- Baking
- Elevating
- De-Elevating

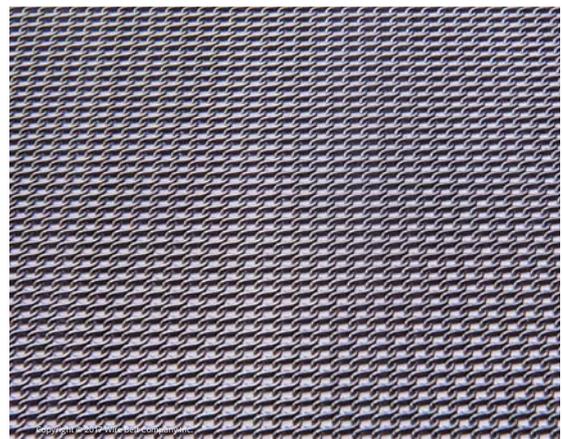

Rolled Baking Band

Rolled Baking Band mesh construction

The open area of the mesh can be varied to suit the application. For example, where soft dough is being conveyed we will supply a tight mesh to ensure complete product support. Conversely, meshes can be supplied with an increased open area for applications where heat efficiency is a major concern.

Rolled Baking Bands may not be suitable for soft doughs with a high fat content where the dough will flow into the mesh in the baking process.

Rolled Baking Bands features a hooked edge finish, eliminating the risk of welded joints becoming dislodged and contaminating product and to ensure maximum flexibility of the belt edges around rollers.


There are 4 standard belts which are listed in the table below:-

Available Specifications

	Belt Type			
	Z47	Z47R	Z28*	Z48
Wire Diameter (mm):	1.2	1.5	1.0	1.3
Pitch (mm):	8.2	8.5	6.3	8.5
Belt Thickness (mm):	2.2	2.8	1.8	2.4
Weight/m ² (Kg):	7.0	11.2	6.5	7.4
Max. Width (mm):	1550	1530	1500	1550
Min. roller diameter for belt flexibility (mm):	300**	300**	300**	300**

* Not recommended for high temperature applications. Designed for light loads with belt lengths up to 100 mtrs.

** The nominal oven drive and idle infeed drum roller diameter would be approximately 1 mtr (dependent upon oven length and process). For new installations with belt lengths in excess of 100 mtrs please confirm full details of the application to our Technical Sales Team for assessment.

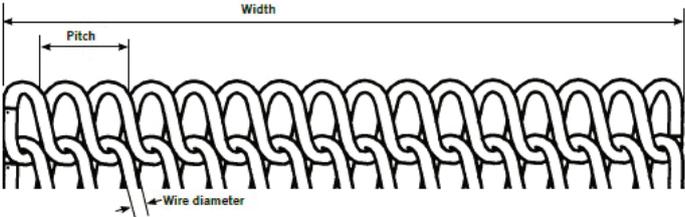



The Trusted Metal Conveyor Belt Manufacturer™

Materials Available

Carbon Steel

All belts are delivered marked with the direction of operation plus 10 connection join coils.

Important Note: Our belts are manufactured on a bespoke basis to suit your exact requirement. Please ensure that the exact full replacement belt length is stated on your enquiry/order. We do not supply short belt lengths to join onto an existing belt.

DO NOT attempt to join on to an existing belt.


Each belt is supplied with an included control length on each end, with a matching number of apertures across the width. For minor belt length adjustment, these control lengths can be cut back equally to suit. If this is necessary, please contact Technical Sales to confirm the maximum belt length reduction without affecting performance.

For more information on which mesh will best suit your application, please contact our Technical Sales Team.



The Trusted Metal Conveyor Belt Manufacturer™

Distributed by:



Our policy is one of continuous improvement and we reserve the right to change specifications at any time and without notice, or modify these to suit manufacturing processes