
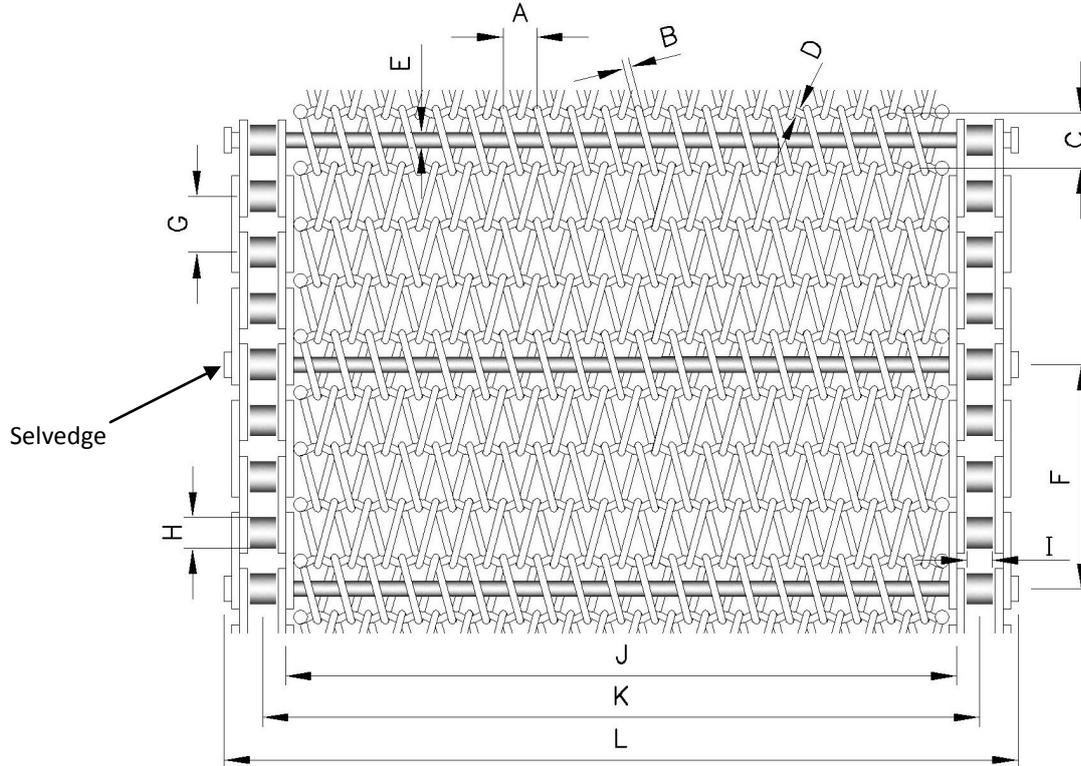


Transmission Chain Edge Balanced Spiral Mesh

Request for Further Information / Quotation



***NOTE:** When measuring pitches A & C, it is best practise to measure over 10 pitches and then divide by 10 to obtain the average pitch.

Selvedge  Welded Washer  Cotter Pin & Washer	<input type="checkbox"/>	Optional cross rod selvedge finishes:
	<input type="checkbox"/>	i) Welded Nut (WN) ii) Welded flush to chain through pin joint iii) Other.....

Coil Pitch (A)*	mm	Chain Pitch (G):	mm
Coil Wire Diameter (B): (If Flat-Wire, Then please give cross section.)	mm	Chain Roller Dia. (H):	mm
Crimped Cross Wire Pitch (C)*	mm	Inside Chain Width (I):	mm
Crimped Cross Wire Dia. (D):	mm	Width Between Chains / Mesh Width (J):	mm
Cross Rod Diameter (E):	mm	Chain Centres (K):	mm
Cross Rod Pitch (F):	mm	Overall Width (L):	mm
Selvedge Finish (see above):		Side Chain Style: Hollow Pin <input type="checkbox"/> / Solid Pin <input type="checkbox"/>	
Chain Edge Material:		Cross Rod Material:	

Please add further information here or on separate sheet:

Please note any Markings or Stamps on Chain or Drive Sprockets